## **INLINE BEARINGS**



**ZVL** Trade Code:

**608 INLINE** 

**Technical Specification Code:** 

608 RSZ TNGH P5 OIL

*Index of Abbreviations:* 

**RSZ** Open cage side with steel shield, the opposite side with non-contact seal

TNG Fiberglass reinforced polyamide cage

**H** Single-piece open cage

**P5** Tolerance class (equivalent to ABEC 7)


**OIL** Oil lubricated

There is a possibility of servicing these bearings by washing in standard washing devices using washing medium e.g. petroleum. It would be necessary to carefully remove the shield with a sharp object prior to washing.

Health & Safety regulations must be kept during washing process. It is advisable to relubricate bearings on regular basis. Depending on intensity of use 2 drops of lubricating oil are to be applied on each occasion.

Each packaging contains 16pcs of bearings.



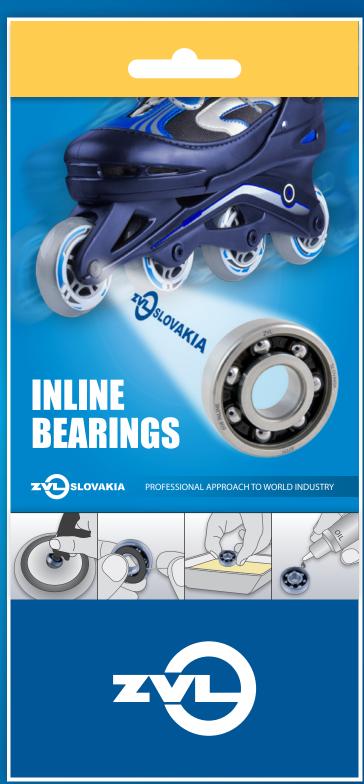



PROFESSIONAL APPROACH TO WORLD INDUSTRY